Light, impact-proof, waterproof plastic housing

Waterproof 32-pin connector

Easy –fast installation, without: gas temperature, lambda probe sensor, RPM signal, water temperature sensor (option)

Types of injectors: (AEB, VALTEK, RAIL, OMVL, HANA, KEIHIN, MATRIX)

- Injection sequence anticipation
- Extended map 12x12
- Gas injectors heating
- Gas injectors diagnostics
- Real time diagnosys on petrol injectors connection
- Start-up diagnosis
- Separate oscilloscope window
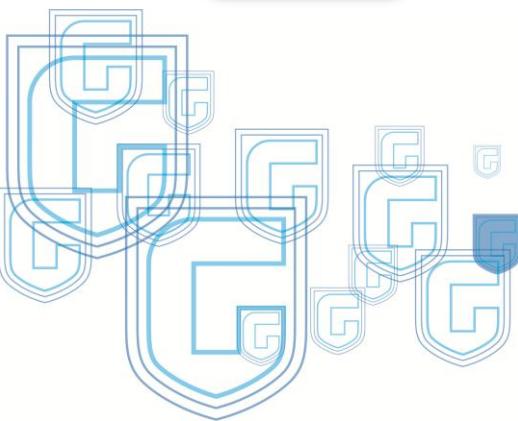
Light, impact-proof, waterproof plastic housing

Waterproof 48-pin connector

Types of injectors: (AEB, VALTEK, RAIL, OMVL, HANA, KEIHIN, MATRIX)

- Petrol addition management
- Valve saver function, split fuel (VSR)
- Injection sequence anticipation
- Extended map 12x12
- Linear Lambda probe emulation
- Gas injectors heating
- Gas injectors diagnostics
- Real time diagnosys on petrol injectors connection
- Start-up diagnosis
- Separate oscilloscope window
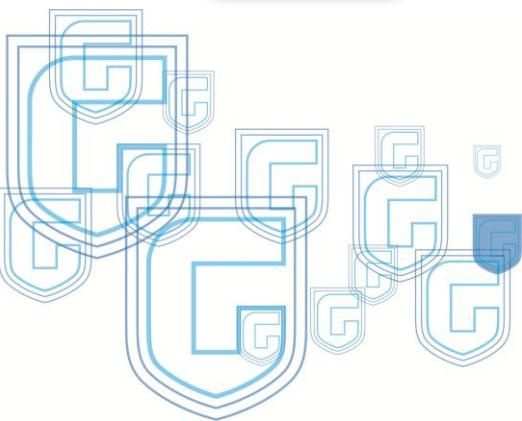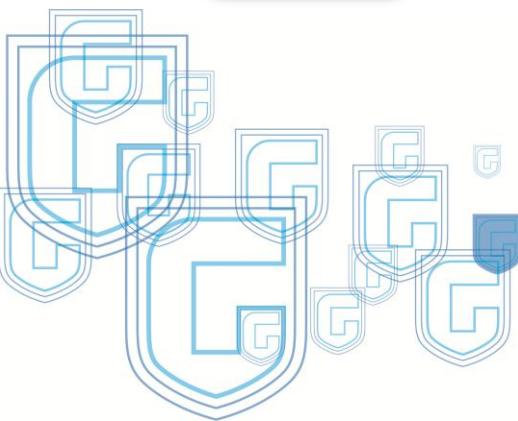
Light, impact-proof, waterproof plastic housing

Waterproof 48-pin connector

OBD- II adaptativity

Automatic OBD-II errors erase

Types of injectors: (AEB, VALTEK, RAIL, OMVL, HANA, KEIHIN, MATRIX)

- Petrol addition management
- Valve saver function, split fuel (VSR)
- Injection sequence anticipation
- Extended map 12x12
- OBD II parameter reading and vizualization
- Linear Lambda probe emulation
- Gas injectors heating
- Gas injectors diagnostics
- Real time diagnosys on petrol injectors connection
- Start-up diagnosis
- Separate oscilloscope window
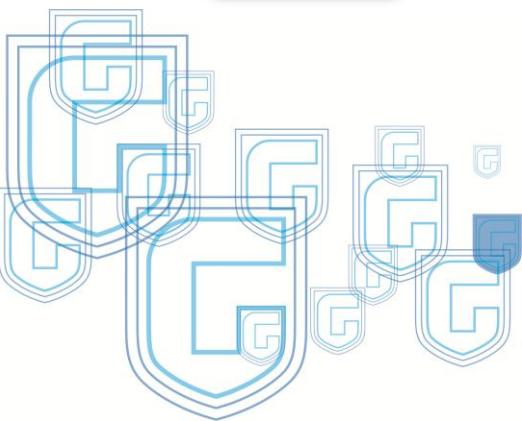
Light, impact-proof, waterproof alumenium housing

Waterproof connector

OBD- II adaptativity, separately for each bank

Automatic OBD-II errors erase

Types of injectors:
(AEB, VALTEK, RAIL, OMVL, HANA, KEIHIN, MATRIX)

- Petrol addition management
- Valve saver function, split fuel (VSR)
- Injection sequence anticipation
- Extended map 12x12
- OBD II parameter reading and vizualization
- Linear Lambda probe emulation
- Gas injectors heating
- Gas injectors diagnostics
- Real time diagnosys on petrol injectors connection
- Start-up diagnosis
- Separate oscilloscope window